

# Medium power lithium-ion cells

## VL M cells

Saft VL M cells combine the benefits of high power lithium electrode technology with enhanced energy density. This cell is proposed in Saft modules or customized battery system constructions.

### Saft's battery system

Individual lithium-ion cells need to be mechanically and electrically integrated into battery systems to operate properly. The battery system include electronic devices for performance, thermal and safety management specific to each application.

### Features

- High specific energy and power
- Excellent cycle and calendar life
- Maintenance free
- Fast continuous charge capability 1C rate

### Applications

- Electric and hybrid vehicles
- Telecommunication networks
- Stationary
- Space and Defence
- Any application requiring an optimal balance between high power and high energy

### Technology

- Graphite-based anode
- Nickel oxide-based cathode
- Electrolyte: blend of carbonate solvents + LiPF<sub>6</sub>




	VL 41M	VL 27M
<b>Electrical characteristics</b>		
Nominal voltage (V)	3,6	3,6
Average capacity C/3 after charge to 4.0 V/cell (Ah)	41	27
Minimum capacity C/3 after charge to 4.0 V/cell (Ah)	39	25
Specific energy after charge to 4.0 V/cell (Wh/kg)	136	124
Energy density after charge to 4.0 V/cell (Wh/dm <sup>3</sup> )	285	252
Specific power (30s peak 50% DOD) (W/kg)	794	987
Power density (30s peak 50% DOD) (W/dm <sup>3</sup> )	1667	2000
<b>Mechanical characteristics</b>		
Diameter (mm)	54.3	54.3
Height (mm)	222	163
Typical weight (kg)	1.07	0.77
Volume (dm <sup>3</sup> )	0.51	0.38
<b>Voltage limits</b>		
Charge (V)	4.0 (4.1 for peak)	
Discharge (V)	2.7 (2.3 for peak)	
<b>Current limits</b>		
Max continuous current (A)	150	110
Max peak current during 30 s (A)	300	300




**SaFT**

# Medium power Li-ion VL 41 M cell


Cell capacity and voltage according to current at +20°C

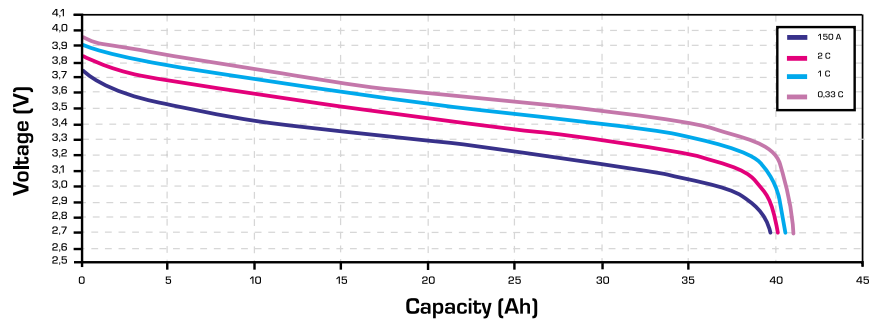

Power during 30 s at 300 A discharge pulse at +20°C

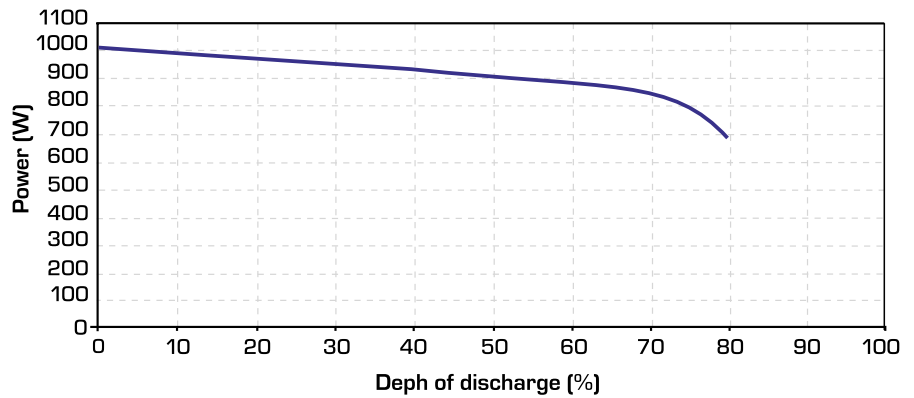

Cycling life in DST profil at 80% of DOD at +20°C. Energy in discharge at C/3 rate and power 30s at 250 A at 50% of S.O.C.

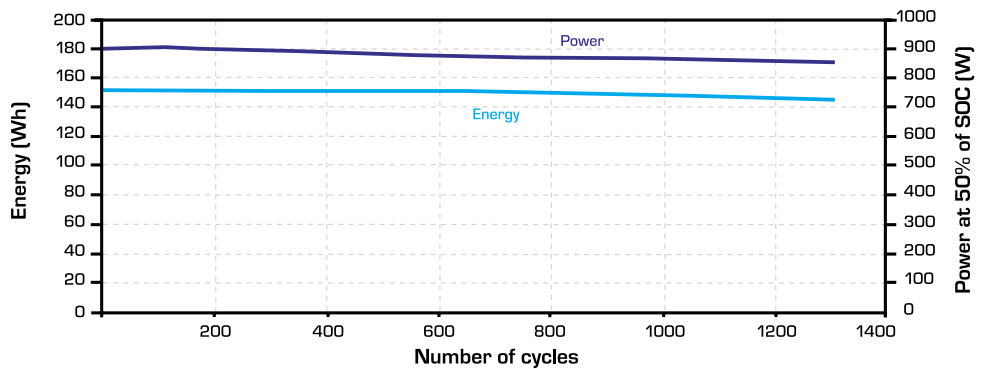

**Saft**  
**Communication Department**  
 12, rue Sadi Carnot  
 93170 Bagnolet - France  
 Phone: +33 (0)1 49 93 19 18  
 Fax: +33 (0)1 49 93 19 68

[www.saftbatteries.com](http://www.saftbatteries.com)

DOC N° 54042-2-0305  
 Edition: March 2005

Data in this document are subject to change without notice and become contractual only after written confirmation by Saft.

Photo credit: Studioland

Société anonyme au capital de 31 944 000 €  
 RCS Bobigny B 383 703 873

Prepared by PACIFIC & co.



**SAFT**